

# COFRE XL



## BASIC SHINY PROFILES COLOURS

 White  
RAL 9010

 Grey aluminum  
RAL 9006

 Ivory  
RAL 1013

 Anthracite textured  
RAL 7016

## OPERATING SYSTEMS

 Crank

 Motor

MAXIMUM WIDTH

**700 cm**

MAXIMUM HEIGHT

**410 cm**

# SYSTEM ADVANTAGE

## AWNINGS & VERANDAS

### Maximum strength and durability

The **belt arm** system, featured in the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre XL and Cofre Style models, extends the lifespan of awnings by up to three times.

- Designed to last up to 30,000 cycles.
- Made with highly durable stainless-steel cables coated in PPU plastic tape, with anti-corrosion treatment and UV protection.


A stylish, functional design also conceals support cables beneath the belt.




### Flawless fabric retraction

The **rollertube\*** system ensures wrinkle-free fabric rolling by incorporating an innovative eyelet design.

\*Available for the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre Style, Cofre XL, Projection Plus, Veranda Plus, Veranda Floor and Veranda Zip models.

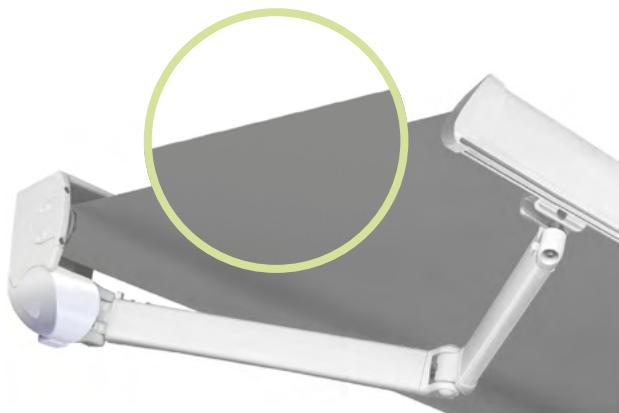

WITH

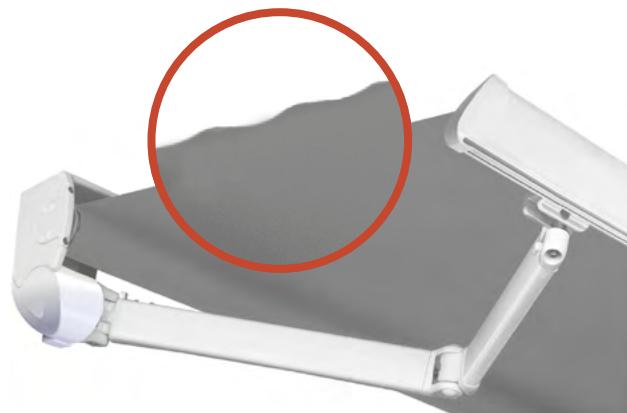

WITHOUT



### Outstanding rainwater protection

The **terminal with integrated drainage**, available on the Classic XL, Monobloc Plus, Cofre Plus, Cofre Style and Cofre XL systems, effectively channels rainwater to prevent accumulation.

Its rounded design includes two eyelets for drop curtain installation if required. The upper eyelet allows the curtain fabric to partially cover the bottom rail, while the lower eyelet keeps another part of it visible. The drainage system spans the entire width of the bottom rail, redirecting water towards the ends to avoid "sheets of water" from forming.

### Convenient one-click operation

All Bandalux awnings can be motorized for effortless operation. Extending or retracting the awning is as simple as pressing a button on the remote control.

Our range includes the quietest and most durable cable and radiofrequency motors available on the market, including the Bandalux range and Somfy® RTS and IO models, along with a wide selection of emitters, sensors and programmers.



### Quick and easy installation


Bandalux awnings are delivered fully assembled, with the limit switches pre-adjusted to simplify the installer's work and significantly reduce installation time.



# COFRE XL



The retractable arm cassette ensures complete closure, with a design that keeps the cassette consistently perpendicular to the wall. An internal system within the casing controls the tilt. Combining design and style with the functionality and technology of the hinged system, it guarantees an airtight seal, even at maximum inclination. A complementary frame means the cassette can fit seamlessly against the wall, preventing water and dirt from seeping through.



Wall or ceiling installation




Prevents the "sheet of water" effect\*




Belt-driven arms

\* Features an integrated drainage system that redirects rainwater to the ends, avoiding accumulation along the width of the bottom rail and the "sheet of water" effect.

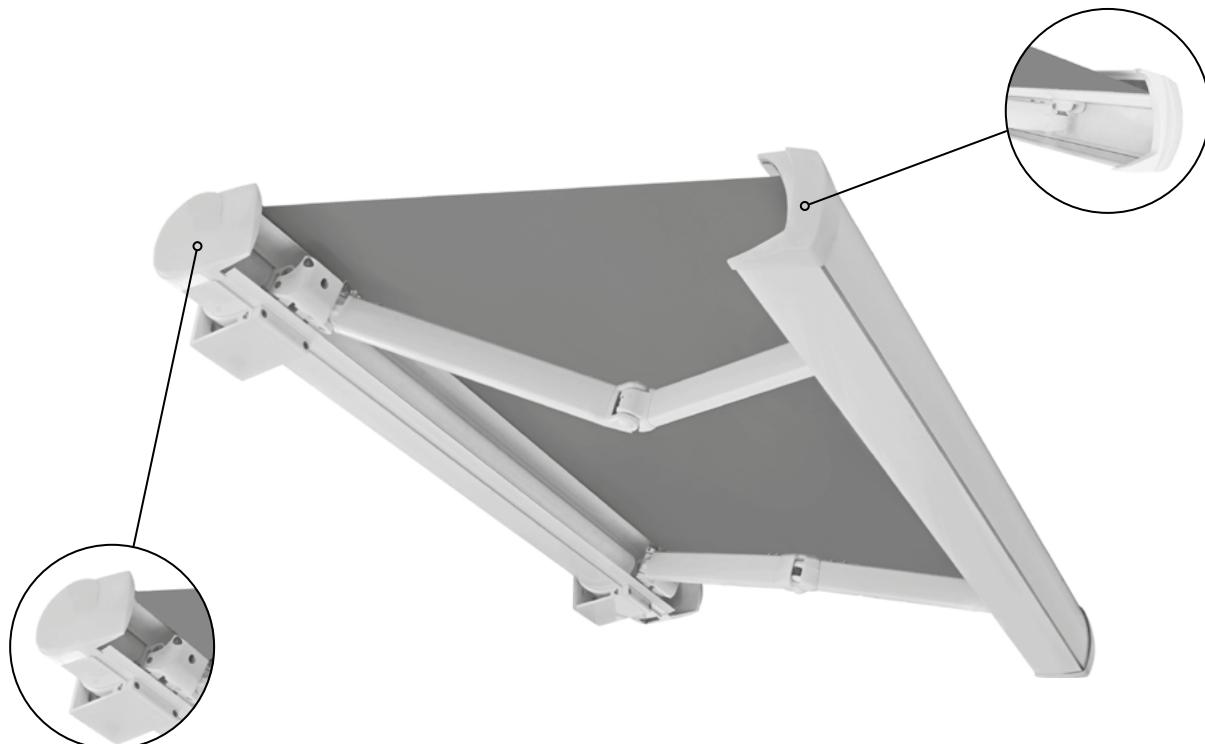


## Dimensions and technical data


Wall installation

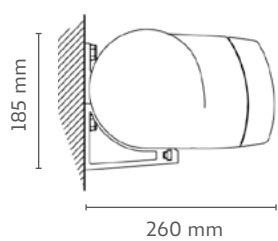


Wall installation with box front bar




Installation between walls

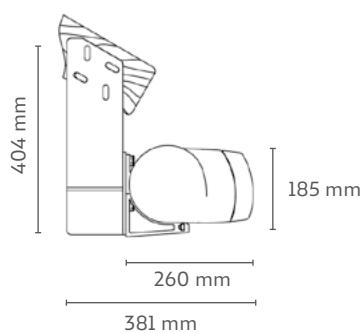

Ceiling installation



Ceiling installation with box front bar



# COFRE XL

## OPTIONS


### Standard configuration

#### Crank rod




Heights available:  
1000 mm, 1200 mm,  
1500 mm, 1800 mm,  
2000 mm, 2500 mm.

#### Wall brackets (Option A)



#### Ceiling brackets (Option B)



#### Basic shiny profiles colours

- White RAL 9010
- Grey aluminum RAL 9006
- Ivory RAL 1013
- Anthracite textured RAL 7016

120 mm cassette ceiling brackets. Included from 4000 mm wide.

### Optional configuration

#### Other profiles and hood colours

#### Volant

#### Hood

### Minimun awning size

NORMAL ARMS	
Projection of: (cm)	Min. Width (cm)
160	212
185	237
210	262
235	287
260	312
285	337
310	374
335	399
360	424
385	449
410	474

### Motorization

Measurements in mm

WIDTH x PROJECTION	MOTORE			AUTOMATISMS
	WIRED	Somfy®	OREA 50 40/17	
500 x 3350 mm 400 x 4100 mm	RADIO	Bandalux	R2 50 40/17	06702000A ELEGANCE 1 BIANCO
		Somfy® RTS	OREA 50 40/17	06702100A ELEGANCE 4 BIANCO
	RADIO IO	Somfy® IO	SUNEA 50 40/17	06700970D SITUO 1 RTS PURE
550 x 4100 mm	WIRED	Bandalux	RIMINI 50 50/12	06700881D SITUO 5 RTS PURE
		Somfy®	OREA 50 50/12	06700620B SITUO 1 IO PURE
	RADIO	Bandalux	R2 50 50/12	06700625B SITUO 5 IO PURE
		Somfy® RTS	OREA 50 50/12	
	RADIO IO	Somfy® IO	SUNEA 50 50/12	
700 x 4100 mm	WIRED	Somfy®	OREA 60 85/17	
	RADIO	Bandalux	R2 60 80/12	
		Somfy® RTS	OREA 60 85/17	
	RADIO IO	Somfy® IO	SUNEA 60 85/17	

# **BANDALUX**