

CLASSIC PLUS



BASIC SHINY PROFILES COLOURS

 White
RAL 9010

 Grey aluminum
RAL 9006

 Ivory
RAL 1013

 Anthracite textured
RAL 7016

OPERATING SYSTEMS

 Crank

 Motor

MAXIMUM WIDTH

500 cm

MAXIMUM HEIGHT

260 cm

SYSTEM ADVANTAGE

AWNINGS & VERANDAS

Maximum strength and durability

The **belt arm** system, featured in the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre XL and Cofre Style models, extends the lifespan of awnings by up to three times.

- Designed to last up to 30,000 cycles.
- Made with highly durable stainless-steel cables coated in PPU plastic tape, with anti-corrosion treatment and UV protection.


A stylish, functional design also conceals support cables beneath the belt.



Flawless fabric retraction

The **rollertube*** system ensures wrinkle-free fabric rolling by incorporating an innovative eyelet design.

*Available for the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre Style, Cofre XL, Projection Plus, Veranda Plus, Veranda Floor and Veranda Zip models.

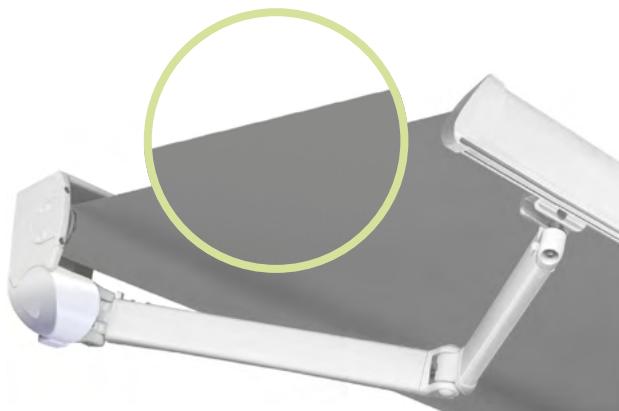

WITH



WITHOUT



Outstanding rainwater protection

The **terminal with integrated drainage**, available on the Classic XL, Monobloc Plus, Cofre Plus, Cofre Style and Cofre XL systems, effectively channels rainwater to prevent accumulation.

Its rounded design includes two eyelets for drop curtain installation if required. The upper eyelet allows the curtain fabric to partially cover the bottom rail, while the lower eyelet keeps another part of it visible. The drainage system spans the entire width of the bottom rail, redirecting water towards the ends to avoid "sheets of water" from forming.

Convenient one-click operation

All Bandalux awnings can be motorized for effortless operation. Extending or retracting the awning is as simple as pressing a button on the remote control.

Our range includes the quietest and most durable cable and radiofrequency motors available on the market, including the Bandalux range and Somfy® RTS and IO models, along with a wide selection of emitters, sensors and programmers.



Quick and easy installation


Bandalux awnings are delivered fully assembled, with the limit switches pre-adjusted to simplify the installer's work and significantly reduce installation time.



CLASSIC PLUS




An affordable retractable arm awning with lacquered, independent lateral supports, ensuring simple adjustment of the arm angle.



Wall or ceiling
installation




Belt-driven
arms

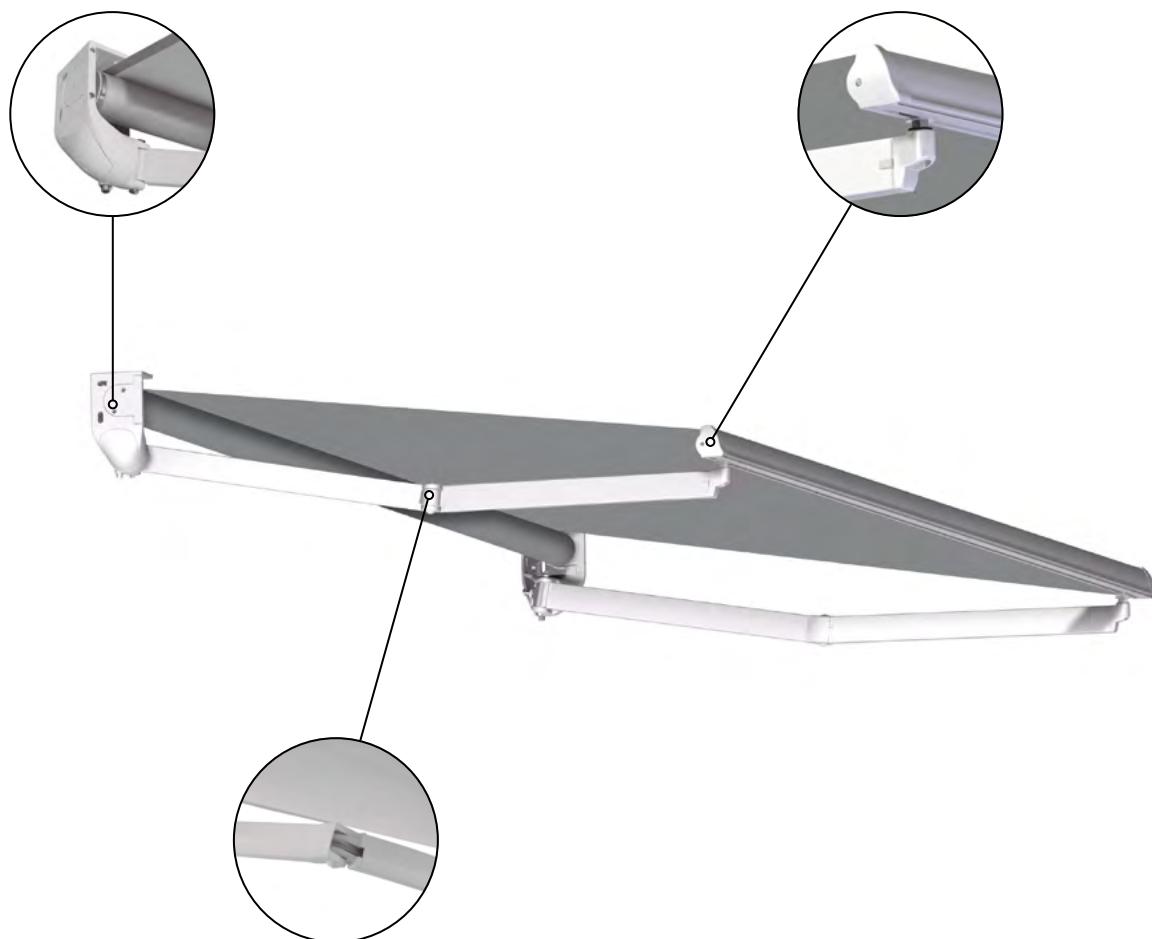


Dimensions and technical data

Wall installation



Ceiling installation




CLASSIC PLUS


OPTIONS

Standard configuration

Crank rod



Complete supports set



Basic shiny profiles colours

- White RAL 9010
- Grey aluminum RAL 9006
- Ivory RAL 1013
- Anthracite textured RAL 7016

Heights available:
1000 mm, 1200 mm,
1500 mm, 1800 mm,
2000 mm, 2500 mm.

Optional configuration

Other profiles and hood colours

Volant

Hood

Motorization

WIDTH x PROJECTION	MOTOR		
350 x 2350 mm	WIRED	Bandalux	M2 50 20/17
		Somfy®	ATLAS 50 15/32
		Somfy®	MAESTRIA 50 15/17
	RADIO	Bandalux	R2 50 20/17
		Somfy® RTS	ALTUS 50 15/17
	RADIO IO	Somfy® IO	SUNSEA SCREEN 50 15/32
500 x 2600 mm	WIRED	Bandalux	M2 50 40/17
		Somfy®	MARINER 50 40/17
		Somfy®	MAESTRIA 50 35/17
	RADIO	Bandalux	R2 50 40/17
		Somfy® RTS	ALTUS 50 40/17
	RADIO IO	Somfy® IO	SUNILUS 50 40/17

AUTOMATISMS	
06702000A	ELEGANCE 1 BIANCO
06702100A	ELEGANCE 4 BIANCO
06700970D	SITUO 1 RTS PURE
06700881D	SITUO 5 RTS PURE
06700620B	SITUO 1 IO PURE
06700625B	SITUO 5 IO PURE

Minimum awning size

NORMAL ARMS	
Projection of: (cm)	Min. Width (cm)
160	193
185	218
210	243
235	268
260	293

BANDALUX