

MONOBLOC PLUS



BASIC SHINY PROFILES COLOURS

 White
RAL 9010

 Grey aluminum
RAL 9006

 Ivory
RAL 1013

 Anthracite textured
RAL 7016

OPERATING SYSTEMS

 Crank

 Motor

MAXIMUM WIDTH

600 cm

MAXIMUM HEIGHT

360 cm

SYSTEM ADVANTAGE

AWNINGS & VERANDAS

Maximum strength and durability

The **belt arm** system, featured in the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre XL and Cofre Style models, extends the lifespan of awnings by up to three times.

- Designed to last up to 30,000 cycles.
- Made with highly durable stainless-steel cables coated in PPU plastic tape, with anti-corrosion treatment and UV protection.


A stylish, functional design also conceals support cables beneath the belt.




Flawless fabric retraction

The **rollertube*** system ensures wrinkle-free fabric rolling by incorporating an innovative eyelet design.

*Available for the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre Style, Cofre XL, Projection Plus, Veranda Plus, Veranda Floor and Veranda Zip models.

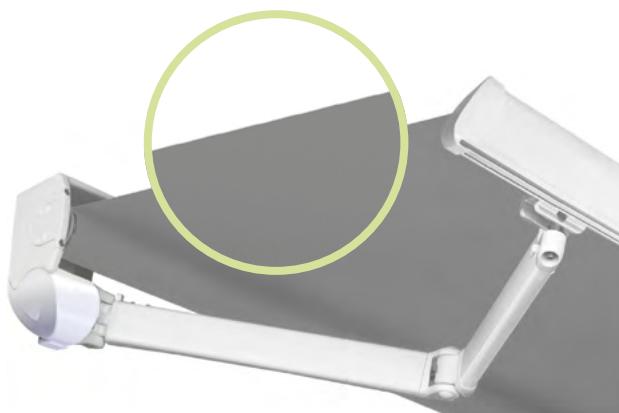

WITH

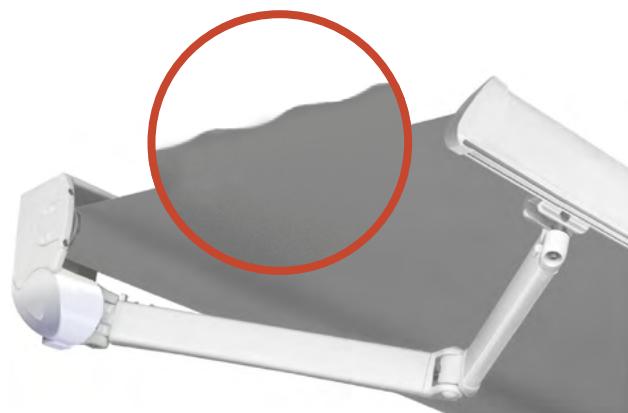

WITHOUT



Outstanding rainwater protection

The **terminal with integrated drainage**, available on the Classic XL, Monobloc Plus, Cofre Plus, Cofre Style and Cofre XL systems, effectively channels rainwater to prevent accumulation.

Its rounded design includes two eyelets for drop curtain installation if required. The upper eyelet allows the curtain fabric to partially cover the bottom rail, while the lower eyelet keeps another part of it visible. The drainage system spans the entire width of the bottom rail, redirecting water towards the ends to avoid "sheets of water" from forming.

Convenient one-click operation

All Bandalux awnings can be motorized for effortless operation. Extending or retracting the awning is as simple as pressing a button on the remote control.

Our range includes the quietest and most durable cable and radiofrequency motors available on the market, including the Bandalux range and Somfy® RTS and IO models, along with a wide selection of emitters, sensors and programmers.



Quick and easy installation


Bandalux awnings are delivered fully assembled, with the limit switches pre-adjusted to simplify the installer's work and significantly reduce installation time.



MONOBLOC PLUS



A robust awning with retractable arms mounted on a square 40 mm galvanized steel bar, this is an easily adjustable option with belt-driven arms and arm support.




Wall or ceiling installation




Prevents the "sheet of water" effect*

! * Features an integrated drainage system that redirects rainwater to the ends, avoiding accumulation along the width of the bottom rail and the "sheet of water" effect.

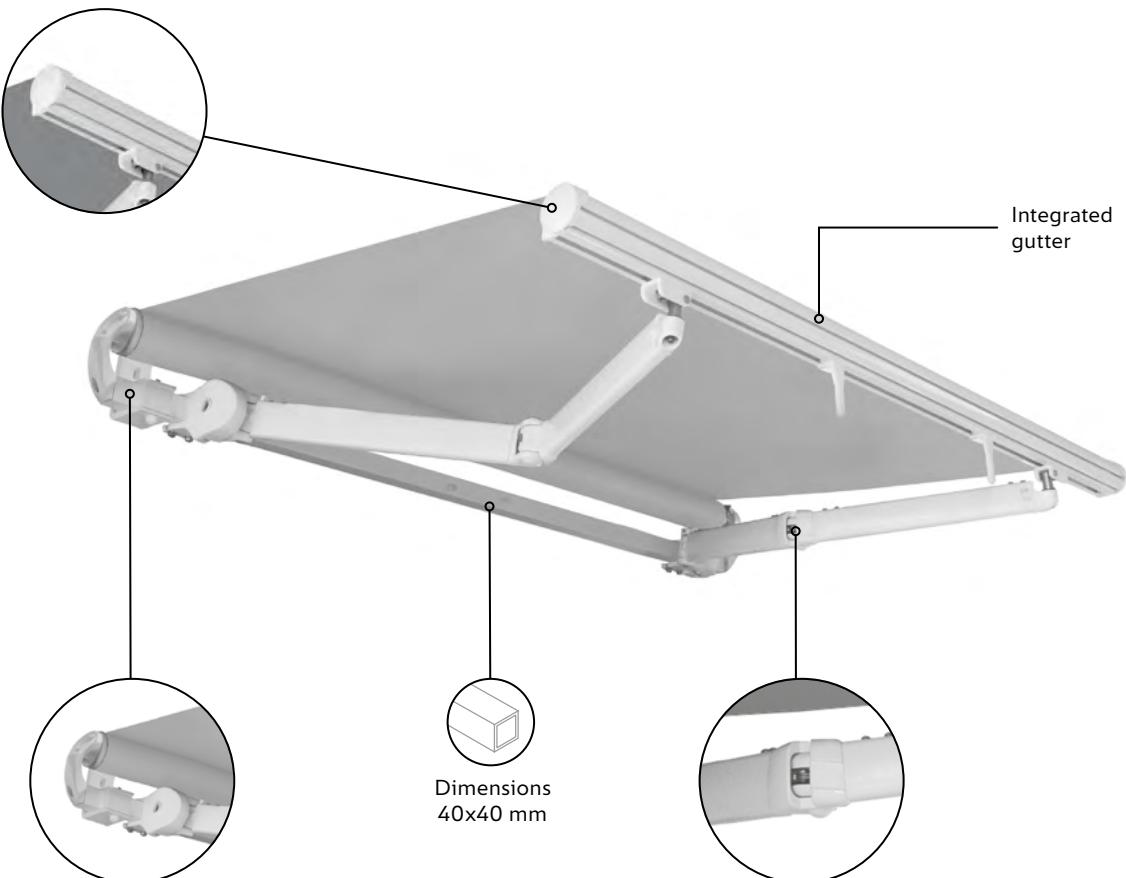


Dimensions and technical data


Wall installation




Wall installation with universal support




Installation under roof



Ceiling installation



Ceiling installation with universal support



MONOBLOC PLUS

OPTIONS


Standard configuration

Crank rod



Heights available:
1000 mm, 1200 mm,
1500 mm, 1800 mm,
2000 mm, 2500 mm.

Wall / Ceiling square bar brackets



Ceiling square bar brackets. Included from 5000 mm width.

Basic shiny profiles colours



Optional configuration

Other profiles and hood colours

Volant

Hood

Motorization

Measurements in mm

WIDTH x PROJECTION	MOTOR		
350 x 2350 mm	WIRED	Bandalux	M2 50 20/17
		Somfy®	ATLAS 50 15/32
		Somfy®	MAESTRIA 50 15/17
	RADIO	Bandalux	R2 50 20/17
		Somfy® RTS	ALTUS 50 15/17
	RADIO IO	Somfy® IO	SUNEA SCREEN 50 15/32
600 x 3350 mm	WIRED	Bandalux	M2 50 40/17
		Somfy®	MARINER 50 40/17
		Somfy®	MAESTRIA 50 35/17
	RADIO	Bandalux	R2 50 40/17
		Somfy® RTS	ALTUS 50 40/17
	RADIO IO	Somfy® IO	SUNILUS 50 40/17
600 x 3600 mm	WIRED	Bandalux	TORINO 50 50/12
		Somfy®	VECTRAN 50 50/12
	RADIO	Bandalux	R2 50 50/12
		Somfy® RTS	ALTUS 50 50/12
	RADIO IO	Somfy® IO	SUNILUS 50 50/12

AUTOMATISMS

06702000A	ELEGANCE 1 BIANCO
06702100A	ELEGANCE 4 BIANCO
06700970D	SITUO 1 RTS PURE
06700881D	SITUO 5 RTS PURE
06700620B	SITUO 1 IO PURE
06700625B	SITUO 5 IO PURE

Minimum awning size

	NORMAL ARMS	CROSSED ARMS
Projection of: (cm)	Min. Width (cm)	Min. Width (cm)
160	201	129
185	226	141
210	251	154
235	276	166
260	300	179
285	326	191
310	351	204
335	376	216
360	401	229

BANDALUX