


COFRE PLUS

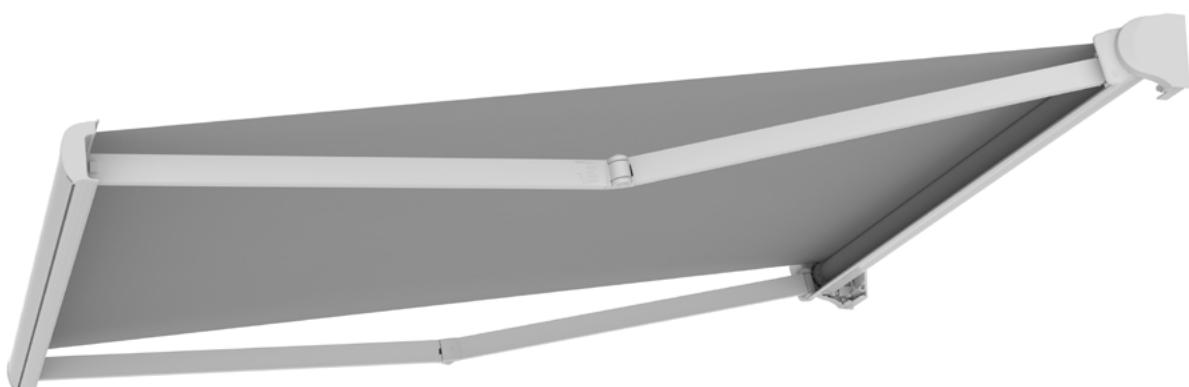

BASIC SHINY PROFILES COLOURS

 White
RAL 9010

 Grey aluminum
RAL 9006

 Ivory
RAL 1013

 Anthracite textured
RAL 7016

OPERATING SYSTEMS

 Crank

 Motor

MAXIMUM WIDTH

450 cm

MAXIMUM HEIGHT

260 cm

SYSTEM ADVANTAGE

AWNINGS & VERANDAS

Maximum strength and durability

The **belt arm** system, featured in the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre XL and Cofre Style models, extends the lifespan of awnings by up to three times.

- Designed to last up to 30,000 cycles.
- Made with highly durable stainless-steel cables coated in PPU plastic tape, with anti-corrosion treatment and UV protection.


A stylish, functional design also conceals support cables beneath the belt.




Flawless fabric retraction

The **rollertube*** system ensures wrinkle-free fabric rolling by incorporating an innovative eyelet design.

*Available for the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre Style, Cofre XL, Projection Plus, Veranda Plus, Veranda Floor and Veranda Zip models.

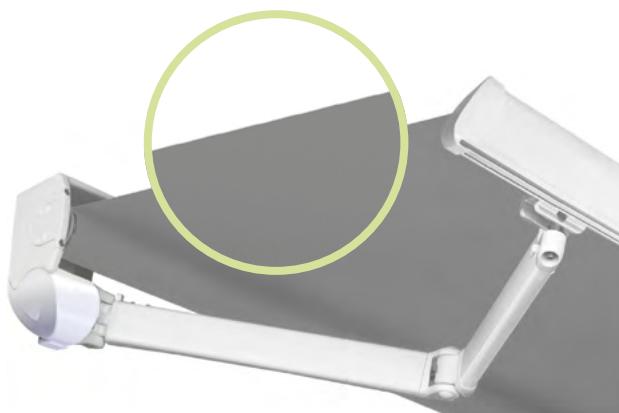

WITH

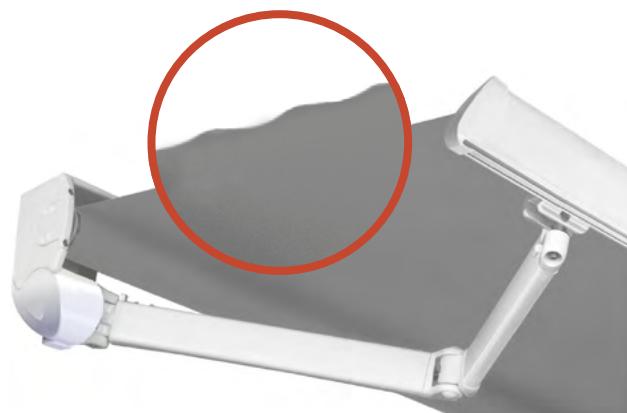

WITHOUT



Outstanding rainwater protection

The **terminal with integrated drainage**, available on the Classic XL, Monobloc Plus, Cofre Plus, Cofre Style and Cofre XL systems, effectively channels rainwater to prevent accumulation.

Its rounded design includes two eyelets for drop curtain installation if required. The upper eyelet allows the curtain fabric to partially cover the bottom rail, while the lower eyelet keeps another part of it visible. The drainage system spans the entire width of the bottom rail, redirecting water towards the ends to avoid "sheets of water" from forming.

Convenient one-click operation

All Bandalux awnings can be motorized for effortless operation. Extending or retracting the awning is as simple as pressing a button on the remote control.

Our range includes the quietest and most durable cable and radiofrequency motors available on the market, including the Bandalux range and Somfy® RTS and IO models, along with a wide selection of emitters, sensors and programmers.



Quick and easy installation


Bandalux awnings are delivered fully assembled, with the limit switches pre-adjusted to simplify the installer's work and significantly reduce installation time.



COFRE PLUS



This cassette-based retractable arm awning features fixed lateral supports and anchoring brackets for straightforward adjustment and installation. Made entirely of lacquered aluminum, it guarantees durability and a sleek appearance.




Wall or ceiling
installation




Prevents the "sheet of
water" effect*

❶* Features an integrated drainage system that redirects rainwater to the ends, avoiding accumulation along the width of the bottom rail and the "sheet of water" effect.

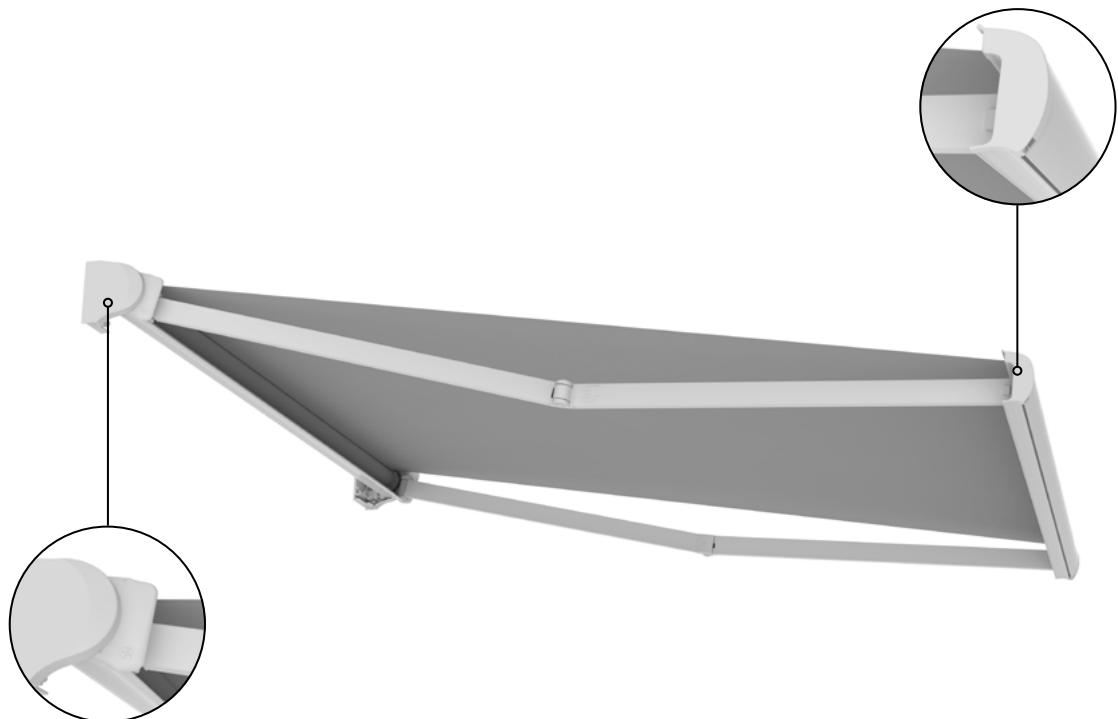


Dimensions and technical data


Wall installation




75° Wall installation



15° Ceiling installation



90° Ceiling installation



COFRE PLUS


OPTIONS

Standard configuration

Crank rod



Complete supports set



Basic shiny profiles colours

- White RAL 9010
- Grey aluminum RAL 9006
- Ivory RAL 1013
- Anthracite textured RAL 7016

Heights available:
1000 mm, 1200 mm,
1500 mm, 1800 mm,
2000 mm, 2500 mm.

Optional configuration

Other profiles and hood colours

Volant

Motorization

WIDTH x PROJECTION	MOTOR			AUTOMATISMS
	WIRED	Somfy®	OREA 50 15/17	
350 x 2100 mm	RADIO	Somfy® RTS	OREA 50 15/17	06702000A ELEGANCE 1 BIANCO
	RADIO IO	Somfy® IO	SUNEA 50 15/17	06702100A ELEGANCE 4 BIANCO
	WIRED	Somfy®	OREA 50 40/17	06700970D SITUO 1 RTS PURE
450 x 2600 mm	RADIO	Bandalux	R2 50 40/17	06700881D SITUO 5 RTS PURE
		Somfy® RTS	OREA 50 40/17	06700620B SITUO 1 IO PURE
	RADIO IO	Somfy® IO	SUNEA 50 40/17	06700625B SITUO 5 IO PURE

Minimum awning size

NORMAL ARMS	
Projection of: (cm)	Min. Width (cm)
160	187
185	210
210	236
235	260
260	286

BANDALUX