


# COFRE STYLE

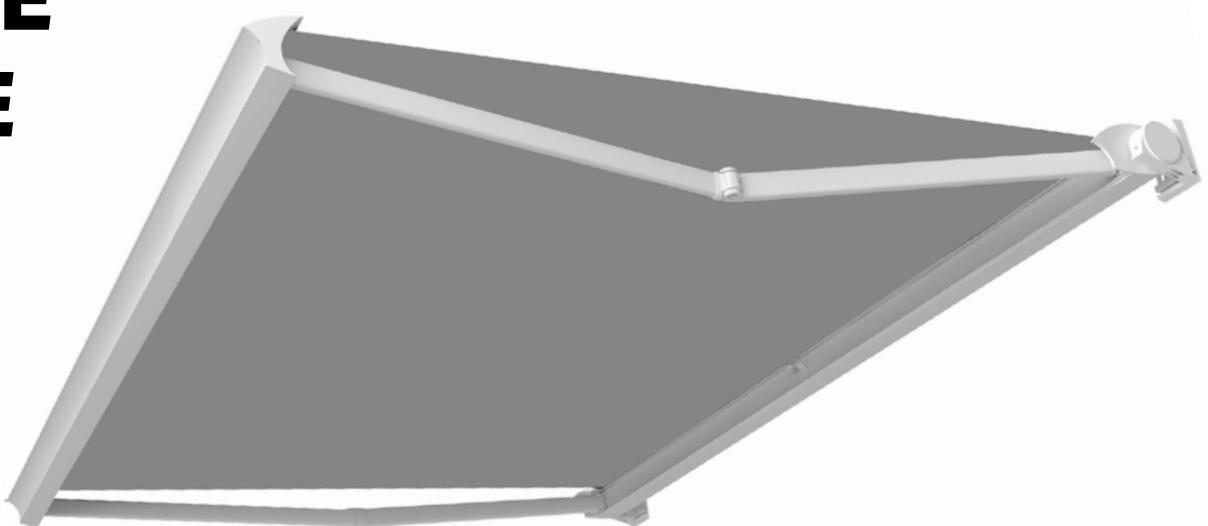

## BASIC SHINY PROFILES COLOURS

 White  
RAL 9010

 Grey aluminum  
RAL 9006

 Ivory  
RAL 1013

 Anthracite textured  
RAL 7016

## OPERATING SYSTEMS

 Crank

 Motor

## MAXIMUM WIDTH X HEIGHT

**600 x 310 cm**  
480 x **360 cm**

# SYSTEM ADVANTAGE

## AWNINGS & VERANDAS

### Maximum strength and durability

The **belt arm** system, featured in the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre XL and Cofre Style models, extends the lifespan of awnings by up to three times.

- Designed to last up to 30,000 cycles.
- Made with highly durable stainless-steel cables coated in PPU plastic tape, with anti-corrosion treatment and UV protection.


A stylish, functional design also conceals support cables beneath the belt.




### Flawless fabric retraction

The **rollertube\*** system ensures wrinkle-free fabric rolling by incorporating an innovative eyelet design.

\*Available for the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre Style, Cofre XL, Projection Plus, Veranda Plus, Veranda Floor and Veranda Zip models.

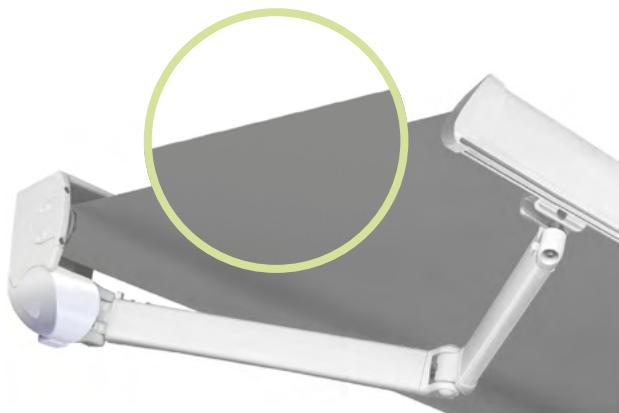

WITH

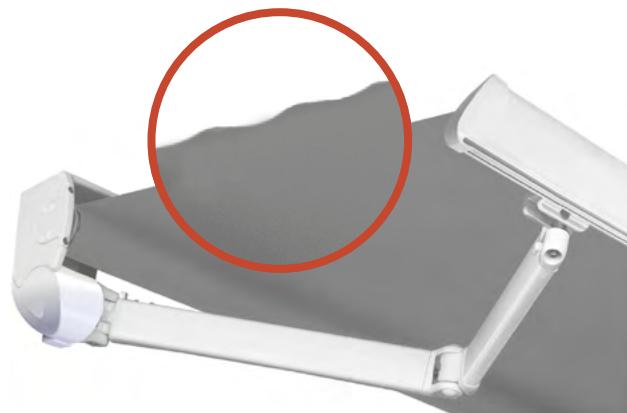

WITHOUT



### Outstanding rainwater protection

The **terminal with integrated drainage**, available on the Classic XL, Monobloc Plus, Cofre Plus, Cofre Style and Cofre XL systems, effectively channels rainwater to prevent accumulation.

Its rounded design includes two eyelets for drop curtain installation if required. The upper eyelet allows the curtain fabric to partially cover the bottom rail, while the lower eyelet keeps another part of it visible. The drainage system spans the entire width of the bottom rail, redirecting water towards the ends to avoid "sheets of water" from forming.

### Convenient one-click operation

All Bandalux awnings can be motorized for effortless operation. Extending or retracting the awning is as simple as pressing a button on the remote control.

Our range includes the quietest and most durable cable and radiofrequency motors available on the market, including the Bandalux range and Somfy® RTS and IO models, along with a wide selection of emitters, sensors and programmers.



### Quick and easy installation

Bandalux awnings are delivered fully assembled, with the limit switches pre-adjusted to simplify the installer's work and significantly reduce installation time.




# COFRE STYLE



**Designed by :** Robby Cantarutti

Designed by Italian architect and industrial designer Robby Cantarutti, innovation meets classic elegance in this eye-catching premium awning that features cutting-edge technology while offering superior safety, exceptional quality and effortless installation and adjustment.



Wall or ceiling installation




Prevents the "sheet of water" effect\*




Belt-driven arms

\* Features an integrated drainage system that redirects rainwater to the ends, avoiding accumulation along the width of the bottom rail and the "sheet of water" effect.

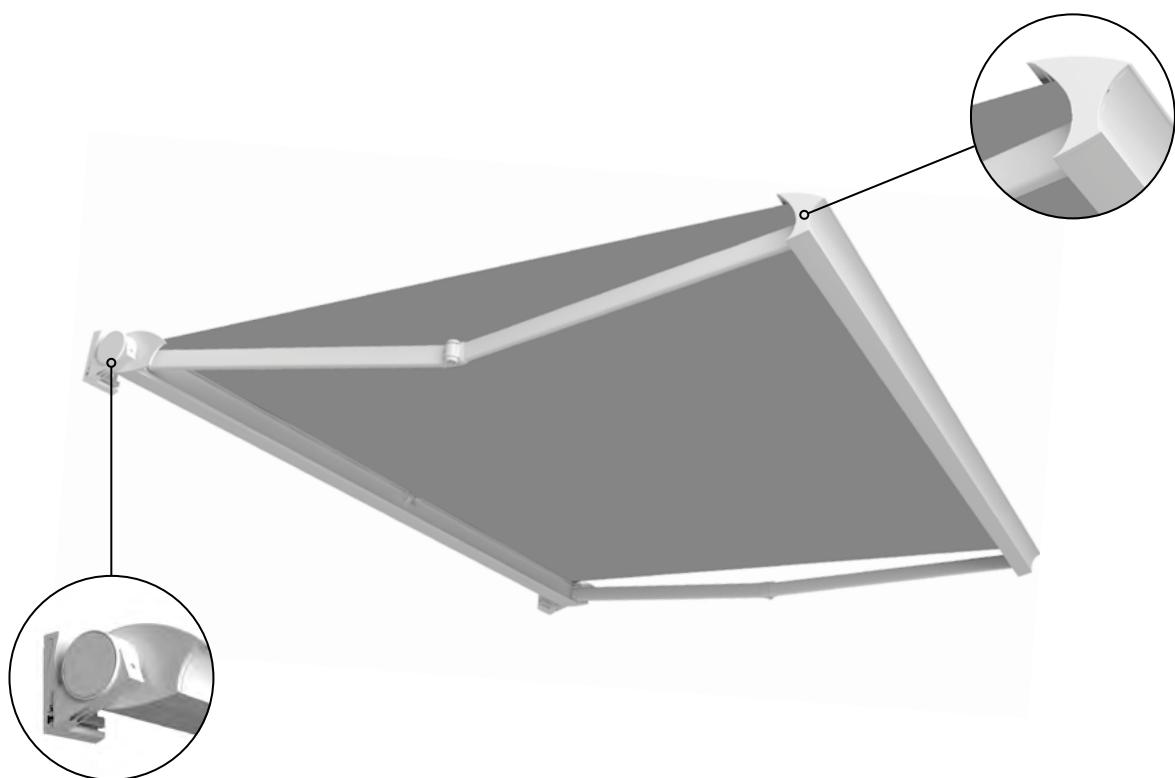


## Dimensions and technical data


Wall installation




80° Wall installation



Ceiling installation



85° Ceiling installation



# COFRE STYLE

## OPTIONS


### Standard configuration

#### Crank rod



Heights available:  
1000 mm, 1200 mm,  
1500 mm, 1800 mm,  
2000 mm, 2500 mm.

#### Complete supports set



#### Basic shiny profiles colours

- White RAL 9010
- Grey aluminum RAL 9006
- Ivory RAL 1013
- Anthracite textured RAL 7016

### Optional configuration

#### Other profiles and hood colours

### Motorization

WIDTH x PROJECTION	MOTOR		
450 x 2600 mm	WIRED	<b>Somfy®</b>	OREA 50 40/17
	RADIO	<b>Bandalux</b>	R2 50 40/17
		<b>Somfy® RTS</b>	OREA 50 40/17
	RADIO IO	<b>Somfy® IO</b>	SUNEA 50 40/17
600 x 3600 mm	WIRED	<b>Bandalux</b>	RIMINI 50 50/12
		<b>Somfy®</b>	OREA 50 50/12
	RADIO	<b>Bandalux</b>	R2 50 50/12
		<b>Somfy® RTS</b>	OREA 50 50/12
	RADIO IO	<b>Somfy® IO</b>	SUNEA 50 50/12

AUTOMATISMS	
06702000A	ELEGANCE 1 BIANCO
06702100A	ELEGANCE 4 BIANCO
06700970D	SITUO 1 RTS PURE
06700881D	SITUO 5 RTS PURE
06700620B	SITUO 1 IO PURE
06700625B	SITUO 5 IO PURE

### Minimum awning size

NORMAL ARMS	
Projection of: (cm)	Min. Width (cm)
160	194
185	219
210	244
235	269
260	294
285	319
310	344
335	369
360	394

# **BANDALUX**