


# PROJECTION PLUS

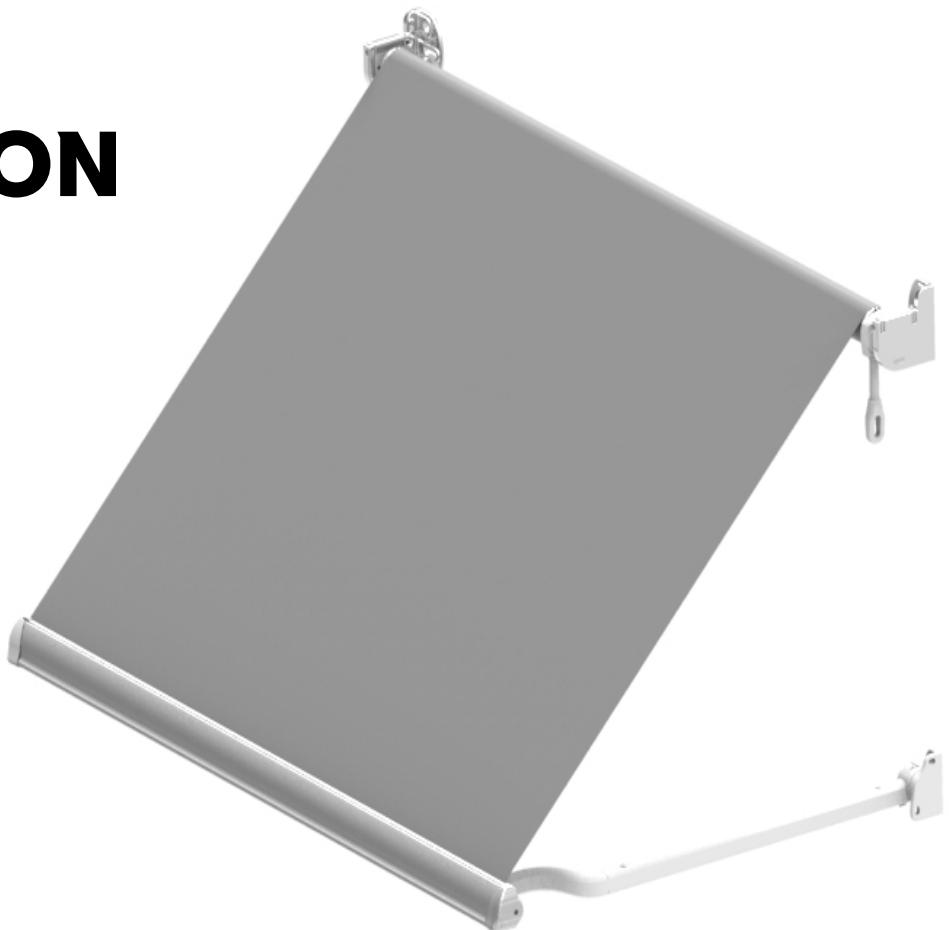

## BASIC SHINY PROFILES COLOURS

 White  
RAL 9010

 Grey aluminum  
RAL 9006

 Ivory  
RAL 1013

 Anthracite textured  
RAL 7016

## OPERATING SYSTEMS

 Crank

 Motor

MAXIMUM WIDTH

**500 cm**

MAXIMUM HEIGHT

**160 cm**

# SYSTEM ADVANTAGE

## AWNINGS & VERANDAS

### Maximum strength and durability

The **belt arm** system, featured in the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre XL and Cofre Style models, extends the lifespan of awnings by up to three times.

- Designed to last up to 30,000 cycles.
- Made with highly durable stainless-steel cables coated in PPU plastic tape, with anti-corrosion treatment and UV protection.


A stylish, functional design also conceals support cables beneath the belt.




### Flawless fabric retraction

The **rollertube\*** system ensures wrinkle-free fabric rolling by incorporating an innovative eyelet design.

\*Available for the Classic Plus, Classic XL, Monobloc Plus, Cofre Plus, Cofre Style, Cofre XL, Projection Plus, Veranda Plus, Veranda Floor and Veranda Zip models.

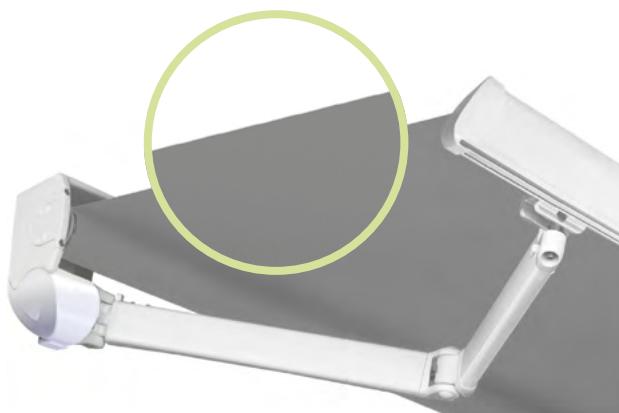

WITH

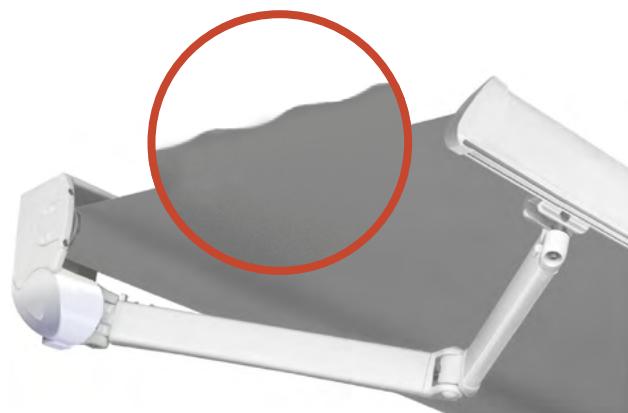

WITHOUT



### Outstanding rainwater protection

The **terminal with integrated drainage**, available on the Classic XL, Monobloc Plus, Cofre Plus, Cofre Style and Cofre XL systems, effectively channels rainwater to prevent accumulation.

Its rounded design includes two eyelets for drop curtain installation if required. The upper eyelet allows the curtain fabric to partially cover the bottom rail, while the lower eyelet keeps another part of it visible. The drainage system spans the entire width of the bottom rail, redirecting water towards the ends to avoid "sheets of water" from forming.

### Convenient one-click operation

All Bandalux awnings can be motorized for effortless operation. Extending or retracting the awning is as simple as pressing a button on the remote control.

Our range includes the quietest and most durable cable and radiofrequency motors available on the market, including the Bandalux range and Somfy® RTS and IO models, along with a wide selection of emitters, sensors and programmers.



### Quick and easy installation


Bandalux awnings are delivered fully assembled, with the limit switches pre-adjusted to simplify the installer's work and significantly reduce installation time.




# PROJECTION PLUS



This compact awning with tensioned arms is perfect for windows or narrow spaces between walls. The arm shape translates into quick, straightforward installation.




Wall or ceiling  
installation

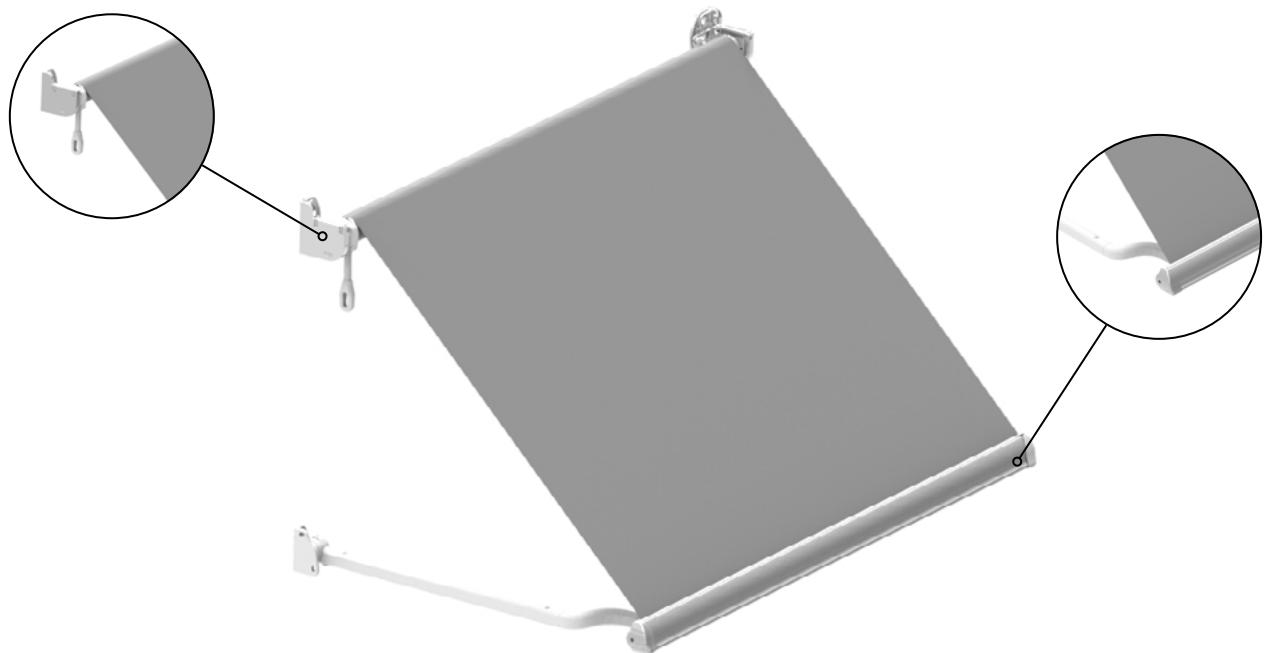


## Dimensions and technical data

### Wall installation

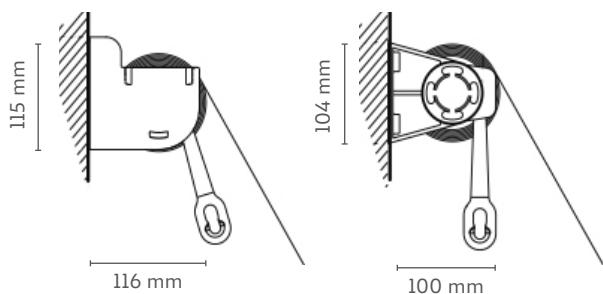

### Ceiling installation

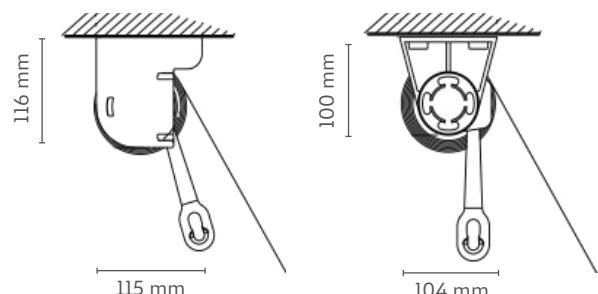

# PROJECTION PLUS

## OPTIONS

### Standard configuration

#### Crank rod



Heights available:  
1000 mm, 1200 mm,  
1500 mm, 1800 mm,  
2000 mm, 2500 mm.

#### Wall / Ceiling brackets with inserts



Wall / ceiling balance support. Included from 2500 mm wide.

#### Basic shiny profiles colours

- White RAL 9010
- Grey aluminum RAL 9006
- Ivory RAL 1013
- Anthracite textured RAL 7016

### Optional configuration

#### Other profiles and hood colours

##### Volant

##### Hood

##### Crank return

### Motorization

WIDTH x PROJECTION	MOTOR		
150 x 1600 mm	WIRED	<b>Bandalux</b>	M2 50 20/17
		<b>Somfy®</b>	ATLAS 50 15/32
		<b>Somfy®</b>	MAESTRIA 50 15/17
	RADIO	<b>Bandalux</b>	R2 50 20/17
		<b>Somfy® RTS</b>	ALTUS 50 15/17
	RADIO IO	<b>Somfy® IO</b>	SUNEEA SCREEN 50 15/32
500 x 1600 mm	WIRED	<b>Bandalux</b>	M2 50 40/17
		<b>Somfy®</b>	MARINER 50 40/17
		<b>Somfy®</b>	MAESTRIA 50 35/17
	RADIO	<b>Bandalux</b>	R2 50 40/17
		<b>Somfy® RTS</b>	ALTUS 50 40/17
	RADIO IO	<b>Somfy® IO</b>	SUNILLUS 50 40/17

AUTOMATISMS	
06702000A	ELEGANCE 1 BIANCO
06702100A	ELEGANCE 4 BIANCO
06700970D	SITUO 1 RTS PURE
06700881D	SITUO 5 RTS PURE
06700620B	SITUO 1 IO PURE
06700625B	SITUO 5 IO PURE

# **BANDALUX**